


# TR FL / TR FS

Drive type nipple, BEL / BES

**HANSA FLEX**

## Properties

<b>Connection 1</b>	Pipe sockets
<b>Sealing form 1</b>	Cutting ring connection
<b>Short code</b>	BEL / BES
<b>Standard</b>	ISO 8434-1
<b>Material</b>	Steel
<b>Surface</b>	electro galvanised

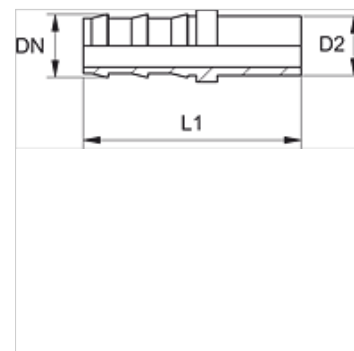

## Note

Final cutting ring assembly must be carried out in the hardened pre-assembly socket (VOM...).

Item						
Identification	DN	Size	Inches	Series	D2 (mm)	L1 (mm)
TR 04 FL	5	3	3/16"	L	6	36
TR 06 FL	6	4	1/4"	L	8	38
TR 08 FL 06	8	5	5/16"	L	8	45
TR 08 FL	8	5	5/16"	L	10	47
TR 10 FL 08	10	6	3/8"	L	10	48
TR 10 FL	10	6	3/8"	L	12	47
TR 13 FL	12	8	1/2"	L	15	57
TR 16 FL	16	10	5/8"	L	18	57
TR 06 FS	6	4	1/4"	S	10	41
TR 08 FS	8	5	5/16"	S	12	47

## Additional elements

VOM Pre-assembly sockets