

TR HL

Drive type nipple, CEL

Properties


Connection 1 metric cylindrical outer thread

Sealing form 1 24° inner cone

Standard ISO 8434-1

Material Steel

Surface electro galvanised

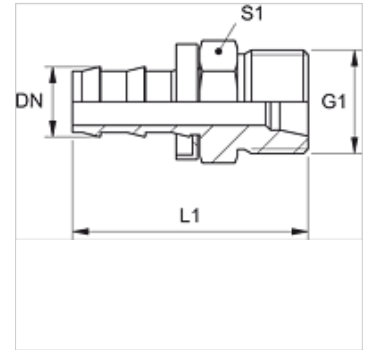

Item

| Identification | DN | Size | Inches | for external pipe Ø (mm) | G1 | L1 (mm) |
|----------------|----|------|--------|-----------------------------|------------|------------|
| TR 04 HL | 5 | 3 | 3/16" | 6 | M 12 x 1.5 | 30 |
| TR 06 HL | 6 | 4 | 1/4" | 8 | M 14 x 1.5 | 31 |
| TR 08 HL 06 | 8 | 5 | 5/16" | 8 | M 14 x 1.5 | 38 |
| TR 08 HL | 8 | 5 | 5/16" | 10 | M 16 x 1.5 | 38 |
| TR 10 HL 08 | 10 | 6 | 3/8" | 10 | M 16 x 1.5 | 38 |
| TR 10 HL | 10 | 6 | 3/8" | 12 | M 18 x 1.5 | 39 |
| TR 13 HL | 12 | 8 | 1/2" | 15 | M 22 x 1.5 | 52 |