
TRPE WT
Polyethylene hose

HANSA-FLEX

Properties

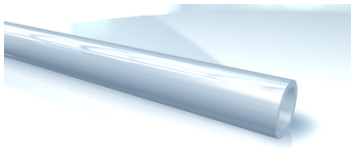

Application	Control lines in hydraulics and pneumatics tank and equipment manufacture laboratory technology
Special features	resistant to temperature and weatherproof low weight
Inner layer	Polyethylene
Insert	none
Outer layer	Polyethylene
Colour	Transparent
Temp. min.	-10 °C
Temp. max.	60 °C
Media	Mineral oil Grease Propellants resistant against aqueous acids, alkalis and salts and a variety of solvents

Note

From 20 °C the pressure reduction factor is to be taken into account.
(Max. operating pressure = operating pressure x factor).
Temp.: 20 °C / 30 °C / 40 °C / 50 °C / 60 °C
Factor: 1,00 / 0,83 / 0,72 / 0,64 / 0,57

Item

Identification	Internal Ø (mm)	External Ø (mm)	Wall thickness (mm)	BD* at 20 °C (bar)	Min. bending radius (mm)
TRPE 04-0.5 WT	3,0	4	0,50	9	20
TRPE 04-0.65 WT	2,7	4	0,65	13	20
TRPE 04-1 WT	2,0	4	1,00	20	20
TRPE 05-1 WT	3,0	5	1,00	15	25
TRPE 06-1 WT	4,0	6	1,00	13	30
TRPE 08-1 WT	6,0	8	1,00	8	40
TRPE 08-1.5 WT	5,0	8	1,50	13	40
TRPE 10-1 WT	8,0	10	1,00	6	60
TRPE 10-1.5 WT	7,0	10	1,50	10	50
TRPE 10-2 WT	6,0	10	2,00	15	50
TRPE 12-1 WT	10,0	12	1,00	5	85
TRPE 12-1.5 WT	9,0	12	1,50	9	60
TRPE 12-2 WT	8,0	12	2,00	12	60
TRPE 14-1.5 WT	11,0	14	1,50	8	80
TRPE 14-2 WT	10,0	14	2,00	9	80
TRPE 15-1.5 WT	12,0	15	1,50	7	90
TRPE 16-2 WT	12,0	16	2,00	8	120
TRPE 18-2 WT	14,0	18	2,00	7	120
TRPE 20-2 WT	16,0	20	2,00	6	120
TRPE 22-2 WT	18,0	22	2,00	5	150
TRPE 25-2.5 WT	20,0	25	2,50	6	150
TRPE 30-2.5 WT	25,0	30	2,50	5	260

BD = Working pressure

Product versions

TRPE WB	Polyethylene hose, blue
TRPE WGE	Polyethylene hose, yellow
TRPE WR	Polyethylene hose, red
TRPE WS	Polyethylene hose, black

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.