


Properties

Design	rod seal
Operating pressure	up to 500 bar
Sliding speed max.	0,5 m/s
Temp. min.	-40 °C
Temp. max.	100 °C
Colour	blue / brown
Material	(1) seal: PU10 (2) Support ring: POM

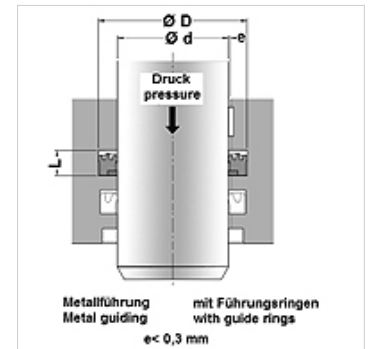

Note

Gap e up to max 0,3 mm

Description

- As buffer seal.
- Easy assembly.
- Easy installation space at the same time small dimensions.
- High abrasion resistance.
- Good extrusion resistance.
- High temperature resistance.

Item

Identification	D (mm)	d (mm)	L (mm)
IBU 60	75	60	9,5
IBU 65	80	65	9,5
IBU 70	85	70	9,5
IBU 75	90	75	9,5
IBU 80	95	80	9,5
IBU 90	105	90	9,5