
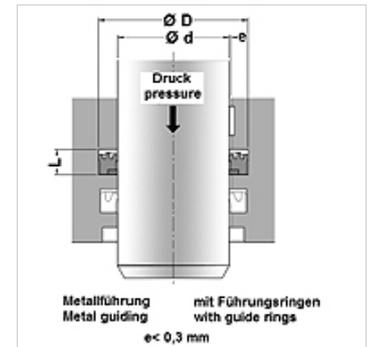


### Properties

<b>Design</b>	rod seal
<b>Operating pressure</b>	up to 500 bar
<b>Sliding speed max.</b>	0,5 m/s
<b>Temp. min.</b>	-40 °C
<b>Temp. max.</b>	100 °C
<b>Colour</b>	blue / brown
<b>Material</b>	(1) seal: PU10 (2) Support ring: POM



### Note

Gap e up to max 0,3 mm

### Description

- As buffer seal.
- Easy assembly.
- Easy installation space at the same time small dimensions.
- High abrasion resistance.
- Good extrusion resistance.
- High temperature resistance.

### Item

Identification	D (mm)	d (mm)	L (mm)
IBU 60	75	60	9,5
IBU 65	80	65	9,5
IBU 70	85	70	9,5
IBU 75	90	75	9,5
IBU 80	95	80	9,5
IBU 90	105	90	9,5