K-2-BK V DURCHG 20-63 INFI


2/2-way ball valve Ø 20 mm - Ø 63 mm full bore

HANSA-FLEX

Properties

Media	Compressed air, vacuum, inert gases
Operating pressure	-0,99 bar - 15 bar
Temp. range	-20 °C to +80 °C
Seal	NBR
Housing	Nickel-plated brass
Clamp ring	Stainless steel 1.4301
Nut	Nickel-plated brass
O-ring	NBR
Locking ring	Technopolymer



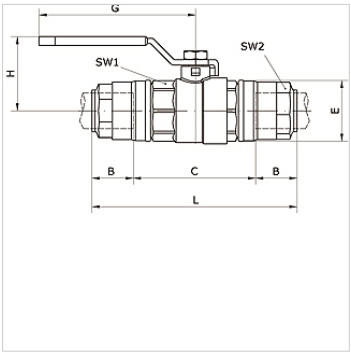

Item

Identification	External pipe Ø	B (mm)	C (mm)	DN	E (mm)	G (mm)	H (mm)	L (mm)	AF1 (mm)	AF2 (mm)
K- 07 40 54 36	20 mm	31,5	58,5	17	34,5	88	42,0	121,5	32	30
K- 07 40 54 37	25 mm	38,5	61,5	22	42,5	106	47,5	138,5	41	35
K- 07 40 54 38	32 mm	46,0	75,0	29	52,0	106	53,0	167,0	50	45
K- 07 40 54 39	40 mm	52,5	81,0	37	63,0	134	65,0	186,0	59	55
K- 07 40 54 40	50 mm	63,5	103,0	46	73,0	134	72,5	230,0	69	65

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.