

K-2-BK V DURCHG INFI

2/2-way ball valve Ø 20 mm - Ø 63 mm full bore

HANSA FLEX

Properties

Media Compressed air, vacuum, inert gases

Operating pressure -0,99 bar - 15 bar

Temp. range -20 °C to +80 °C

Seal NBR


Housing Nickel-plated brass

Clamp ring Stainless steel 1.4301

Nut Aluminium

O-ring NBR

Locking ring Technopolymer

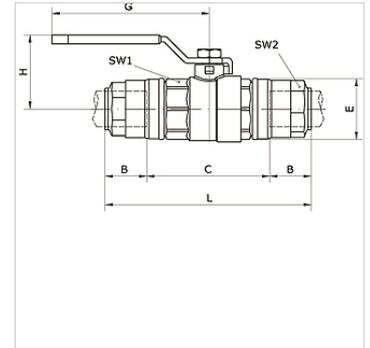

Item

| Identification | External pipe Ø | B (mm) | C (mm) | DN | E (mm) | G (mm) | H (mm) | L (mm) | AF1 (mm) | AF2 (mm) |
|----------------|-----------------|-----------|-----------|----|-----------|-----------|-----------|-----------|-------------|-------------|
| K- 07 40 55 05 | 63 mm | 57,5 | 38,0 | 59 | 94,0 | 240 | 111,5 | 232,0 | 89 | 75 |