

K-2-BK V DURCHG INFI

2/2-way ball valve \varnothing 20 mm - \varnothing 63 mm full bore

HANSA FLEX

Properties

Media Compressed air, vacuum, inert gases

Operating pressure -0,99 bar - 15 bar

Temp. range -20 °C to +80 °C

Seal NBR


Housing Nickel-plated brass

Clamp ring Stainless steel 1.4301

Nut Aluminium

O-ring NBR

Locking ring Technopolymer

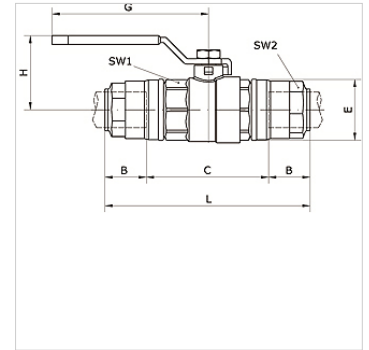

Item

Identification	External pipe \varnothing	B (mm)	C (mm)	DN	E (mm)	G (mm)	H (mm)	L (mm)	AF1 (mm)	AF2 (mm)
K- 07 40 55 05	63 mm	57,5	38,0	59	94,0	240	111,5	232,0	89	75