


# K-3WSV ELKT HANSA PRO

3/2-way poppet valve, electrically actuated, for HANSA PRO

**HANSA FLEX**

## Properties

<b>Media temperature</b>	-10 °C to +50 °C
<b>Ambient temperature</b>	-10 °C to +50 °C
<b>Media</b>	Compressed air
<b>Protection IP</b>	IP 65 acc. to DIN 40050
<b>Mounting type</b>	Line mounting, mounting kit or wall mounting
<b>Operation</b>	electrical
<b>Pressure range</b>	2 - 10 bar
<b>Installation position</b>	Any
<b>Nominal flow-rate G1/2</b>	5.200 l/min (P1 = 6 bar/Delta P = 1 bar)
<b>Nominal flow-rate G 3/8</b>	4.300 l/min (P1 = 6 bar/Delta P = 1 bar)
<b>PE max 11</b>	10 bar
<b>Housing</b>	PA66

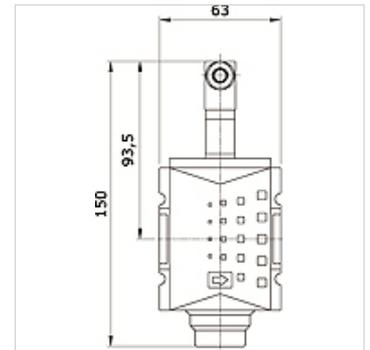

## Item

Identification	Connection	Rated voltage/ current type	Size
K- 07 25 22 48	G 3/8 i	24 V DC	2
K- 07 25 22 49	G 3/8 i	115 V AC 50 Hz	2
K- 07 25 22 50	G 3/8 i	230 V AC 50 Hz	2
K- 07 25 22 51	G 1/2 i	24 V DC	2
K- 07 25 22 52	G 1/2 i	115 V AC 50 Hz	2
K- 07 25 22 53	G 1/2 i	230 V AC 50 Hz	2