


# K-3WSV ELKT OS HANSA PRO

3/2-way poppet valve electrically actuated, HANSA PRO

## Properties

<b>Media temperature</b>	-10 °C to +50 °C
<b>Ambient temperature</b>	-10 °C to +50 °C
<b>Media</b>	Compressed air
<b>Protection IP</b>	IP 65 acc. to DIN 40050
<b>Mounting type</b>	Line mounting, mounting kit or wall mounting
<b>Operation</b>	electrical
<b>Pressure range</b>	2 - 10 bar
<b>Installation position</b>	Any
<b>Nominal flow-rate G1/2</b>	5.200 l/min (P1 = 6 bar/Delta P = 1 bar)
<b>Nominal flow-rate G 3/8</b>	4.300 l/min (P1 = 6 bar/Delta P = 1 bar)
<b>PE max 11</b>	10 bar
<b>Housing</b>	PA66

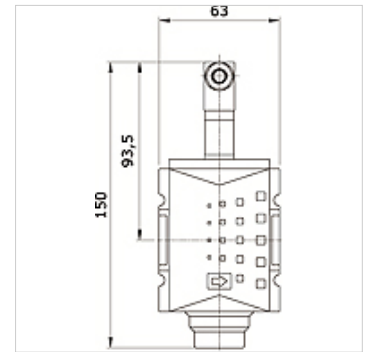

## Item

Identification	Connection	Rated voltage/ current type	Size
K- 07 25 22 56	G 3/8 i	no coil	2
K- 07 25 22 57	G 1/2 i	no coil	2