K-3WSV PNEU HANSA PRO


3/2-way poppet valve pneumatically actuated, HANSA PRO

HANSA-FLEX

Properties

Media temperature	-10 °C to +50 °C
Ambient temperature	-10 °C to +50 °C
Media	Compressed air
Mounting type	Line mounting, mounting kit or wall mounting
Operation	Pneumatic
Installation position	Any
Nominal flow-rate G1/2	5.200 l/min (P1 = 6 bar/Delta P = 1 bar)
Nominal flow-rate G 3/8	4.300 l/min (P1 = 6 bar/Delta P = 1 bar)
PE max 11	16 bar
Housing	PA66



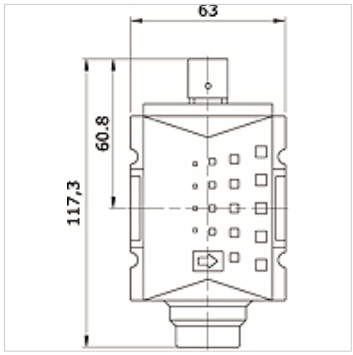

Item

Identification	Connection	Size
K- 07 25 22 58	G 3/8 i	2
K- 07 25 22 59	G 1/2 i	2

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.