


# K-3WSV PNEU HANSA PRO

3/2-way poppet valve pneumatically actuated, HANSA PRO

**HANSA FLEX**

## Properties

<b>Media temperature</b>	-10 °C to +50 °C
<b>Ambient temperature</b>	-10 °C to +50 °C
<b>Media</b>	Compressed air
<b>Mounting type</b>	Line mounting, mounting kit or wall mounting
<b>Operation</b>	Pneumatic
<b>Installation position</b>	Any
<b>Nominal flow-rate G1/2</b>	5.200 l/min (P1 = 6 bar/Delta P = 1 bar)
<b>Nominal flow-rate G 3/8</b>	4.300 l/min (P1 = 6 bar/Delta P = 1 bar)
<b>PE max 11</b>	16 bar
<b>Housing</b>	PA66

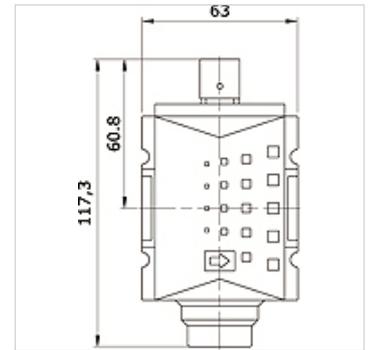

## Item

Identification	Connection	Size
K- 07 25 22 58	G 3/8 i	2
K- 07 25 22 59	G 1/2 i	2