


K-AFSV HANSA PRO

Start-up poppet valve, HANSA PRO

Properties

| | |
|--------------------------------|--|
| Media temperature | -10 °C to +50 °C |
| Ambient temperature | -10 °C to +50 °C |
| Media | Compressed air |
| Design | Operated by secondary pressure |
| Mounting type | Line mounting, mounting kit or wall mounting |
| Installation position | Any |
| Nominal flow-rate G1/2 | 5.200 l/min (P1 = 6 bar/Delta P = 1 bar) |
| Nominal flow-rate G 3/8 | 4.300 l/min (P1 = 6 bar/Delta P = 1 bar) |
| PE max 11 | 16 bar |
| Housing | PA66 |

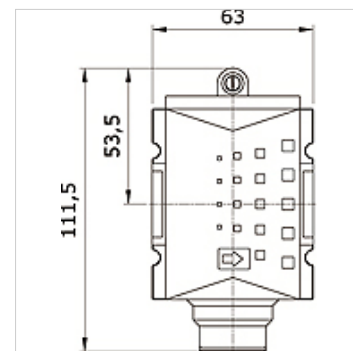

Item

| Identification | Connection | Size |
|----------------|------------|------|
| K- 07 25 22 60 | G 3/8 i | 2 |
| K- 07 25 22 61 | G 1/2 i | 2 |