


# K-FI HANSA PRO

Compressed air filter, with manual/semi-automatic condensate drain,  
HANSA PRO

**HANSA FLEX**

## Properties

<b>Media temperature</b>	-10 °C to +50 °C
<b>Ambient temperature</b>	-10 °C to +50 °C
<b>Media</b>	Compressed air
<b>Design</b>	Centrifugal filter
<b>Mounting type</b>	Line mounting, mounting kit or wall mounting
<b>Installation position</b>	Vertical, drain down
<b>Filter rating</b>	5,00 µm
<b>max. condensate quantity</b>	49 cc
<b>Nominal flow-rate G1/2</b>	3.500 l/min (P1 = 6 bar/Delta P = 1 bar)
<b>Nominal flow-rate G 3/8</b>	3.500 l/min (P1 = 6 bar/Delta P = 1 bar)
<b>Pe max</b>	16 bar
<b>Filter element</b>	Cellpor
<b>Housing</b>	PA66

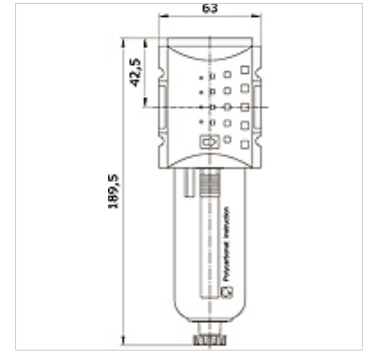

## Item

Identification	Connection	Container	Size	condensate outlet
K- 07 25 21 20	G 3/8 i	polycarbonate with protective cage	2	manual / semi-automatic
K- 07 25 21 21	G 1/2 i	polycarbonate with protective cage	2	manual / semi-automatic
K- 07 25 21 22	G 3/8 i	zinc with visual display	2	manual / semi-automatic
K- 07 25 21 23	G 1/2 i	zinc with visual display	2	manual / semi-automatic