
K-FI HANSA PRO

Compressed air filter, with manual/semi-automatic condensate drain, HANSA PRO

Properties

Media temperature	-10 °C to +50 °C
Ambient temperature	-10 °C to +50 °C
Media	Compressed air
Design	Centrifugal filter
Mounting type	Line mounting, mounting kit or wall mounting
Installation position	Vertical, drain down
Filter rating	5,00 µm
max. condensate quantity	49 cc
Nominal flow-rate G1/2	3.500 l/min (P1 = 6 bar/Delta P = 1 bar)
Nominal flow-rate G 3/8	3.500 l/min (P1 = 6 bar/Delta P = 1 bar)
Pe max	16 bar
Filter element	Cellpor
Housing	PA66



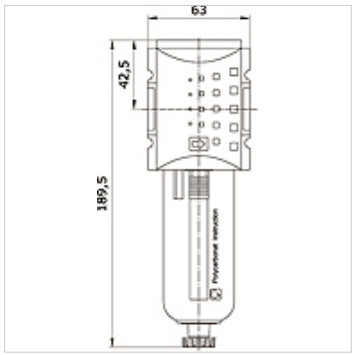

Item

Identification	Connection	Container	Size	condensate outlet
K- 07 25 21 20	G 3/8 i	polycarbonate with protective cage	2	manual / semi-automatic
K- 07 25 21 21	G 1/2 i	polycarbonate with protective cage	2	manual / semi-automatic
K- 07 25 21 22	G 3/8 i	zinc with visual display	2	manual / semi-automatic
K- 07 25 21 23	G 1/2 i	zinc with visual display	2	manual / semi-automatic

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.