
K-FI FEIN HANSA PRO

Compressed air fine filter, with manual/semi-automatic condensate drain, HANSA PRO

Properties

Media temperature	-10 °C to +50 °C
Ambient temperature	-10 °C to +50 °C
Media	Compressed air
Design	fiber filter
Mounting type	Line mounting, mounting kit or wall mounting
Installation position	Vertical, drain down
Filter rating	0,01 µm
filter efficiency	99.999 %
Nominal flow-rate G1/2	750 l/min (P1 = 6 bar/Delta P = 0,1 bar)
Nominal flow-rate G 3/8	750 l/min (P1 = 6 bar/Delta P = 0,1 bar)
Pe max	16 bar
Filter element	Borsilicate-Al
Housing	PA66
Residual oil content	0,01 mg/m3



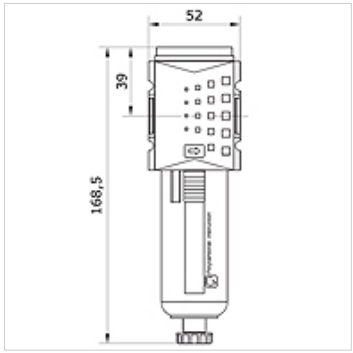

Item

Identification	Connection	Container	Size	condensate outlet
K- 07 25 21 28	G 3/8 i	polycarbonate with protective cage	2	manual / semi-automatic
K- 07 25 21 29	G 1/2 i	polycarbonate with protective cage	2	manual / semi-automatic
K- 07 25 21 30	G 3/8 i	zinc with visual display	2	manual / semi-automatic
K- 07 25 21 31	G 1/2 i	zinc with visual display	2	manual / semi-automatic

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.