

# K-G VB 20-63 INFI

Straight push-in connector  $\varnothing$  20 mm –  $\varnothing$  63 mm

**HANSA FLEX**

## Properties

**Media** Compressed air, vacuum, inert gases

**Operating pressure** -0,99 bar - 15 bar

**Temp. range** -20 °C to +80 °C

**Seal** NBR


**Housing** Nickel-plated brass

**Clamp ring** Stainless steel 1.4301

**Nut** Nickel-plated brass

**O-ring** NBR

**Locking ring** Technopolymer

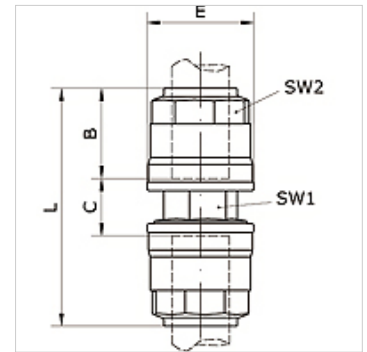

## Item

| Identification | External pipe $\varnothing$ | B<br>(mm) | C<br>(mm) | E<br>(mm) | L<br>(mm) | AF1<br>(mm) | AF2<br>(mm) |
|----------------|-----------------------------|-----------|-----------|-----------|-----------|-------------|-------------|
| K- 07 40 53 50 | 20 mm                       | 31,5      | 14,5      | 34,5      | 76,5      | 21          | 30          |
| K- 07 40 53 51 | 25 mm                       | 38,5      | 13,5      | 42,5      | 90,5      | 26          | 35          |
| K- 07 40 53 52 | 32 mm                       | 46,0      | 14,5      | 52,0      | 106,5     | 32          | 45          |
| K- 07 40 53 53 | 40 mm                       | 52,0      | 21,0      | 63,0      | 125,0     | 41          | 55          |
| K- 07 40 53 54 | 50 mm                       | 63,5      | 21,5      | 73,0      | 148,5     | 50          | 65          |