

K-STECK VB 20-63 INFI

Straight push-in connector \varnothing 20 mm – \varnothing 63 mm

HANSA FLEX

Properties

Media Compressed air, vacuum, inert gases

Operating pressure -0,99 bar - 15 bar

Temp. range -20 °C to +80 °C

Seal NBR


Housing Aluminium

Clamp ring Stainless steel 1.4301

Nut Aluminium

O-ring NBR

Locking ring Technopolymer

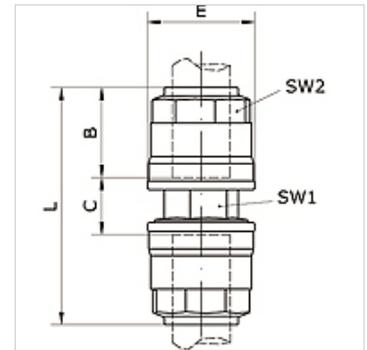

Item

Identification	External pipe \varnothing	B (mm)	C (mm)	E (mm)	L (mm)	AF1 (mm)	AF2 (mm)
K- 07 40 54 97	63 mm	57,5	44,0	94,0	159,0	73	75