
K-STECK VB 20-63 INFI


Straight push-in connector Ø 20 mm – Ø 63 mm

HANSA-FLEX

Properties

Media	Compressed air, vacuum, inert gases
Operating pressure	-0,99 bar - 15 bar
Temp. range	-20 °C to +80 °C
Seal	NBR
Housing	Aluminium
Clamp ring	Stainless steel 1.4301
Nut	Aluminium
O-ring	NBR
Locking ring	Technopolymer



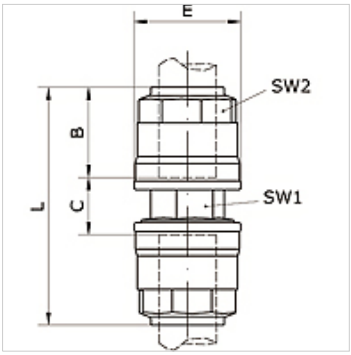

Item

Identification	External pipe Ø	B (mm)	C (mm)	E (mm)	L (mm)	AF1 (mm)	AF2 (mm)
K- 07 40 54 97	63 mm	57,5	44,0	94,0	159,0	73	75

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.