


K-STECK VS ABLASS 20-63 INFI

press-lock Ø 20 mm – Ø 63 mm with condensate drain

Properties

| | |
|---------------------------|-------------------------------------|
| Media | Compressed air, vacuum, inert gases |
| Operating pressure | -0,99 bar - 15 bar |
| Temp. range | -20 °C to +80 °C |
| Seal | NBR |
| Housing | Nickel-plated brass |
| Clamp ring | Stainless steel 1.4301 |
| Nut | Nickel-plated brass |
| O-ring | NBR |
| Locking ring | Technopolymer |

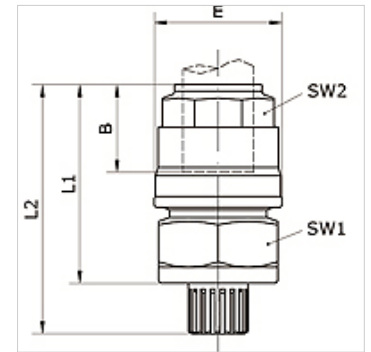

Item

| Identification | External pipe Ø | B (mm) | E (mm) | L1 (mm) | L2 (mm) | AF1 (mm) | AF2 (mm) |
|----------------|-----------------|-----------|-----------|------------|------------|-------------|-------------|
| K- 07 40 53 86 | 20 mm | 36,0 | 34,5 | 52,5 | 67,0 | 32 | 30 |
| K- 07 40 53 87 | 25 mm | 38,5 | 42,5 | 57,5 | 72,0 | 32 | 35 |
| K- 07 40 53 88 | 32 mm | 46,0 | 52,0 | 67,5 | 82,0 | 38 | 45 |
| K- 07 40 53 89 | 40 mm | 52,0 | 63,0 | 77,0 | 91,5 | 50 | 55 |
| K- 07 40 53 90 | 50 mm | 63,5 | 73,0 | 86,5 | 101,0 | 55 | 65 |