# K-T-STECK VB 20-63 SCHANH IG INFI


T-push-in connector Ø 20 mm – Ø 63 mm with integrated gooseneck and internal thread

HANSA-FLEX

## Properties

| | |
|---|---|
| **Media** | Compressed air, vacuum, inert gases |
| **Operating pressure** | -0,99 bar - 15 bar |
| **Temp. range** | -20 °C to +80 °C |
| **Seal** | NBR |
| **Housing** | Aluminium |
| **Clamp ring** | Stainless steel 1.4301 |
| **Nut** | Aluminium |
| **O-ring** | NBR |
| **Locking ring** | Technopolymer |



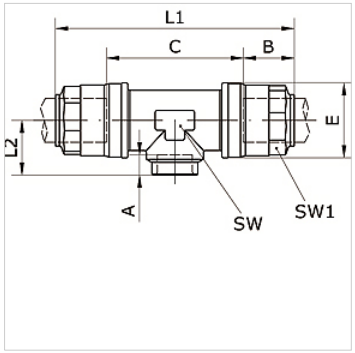


## Item

| Identification | External pipe Ø | Connection | A (mm) | B (mm) | C (mm) | E (mm) | L1 (mm) | L2 (mm) | AF (mm) | AF1 (mm) |
|---|---|---|---|---|---|---|---|---|---|---|
| **K- 07 40 55 02** | 63 mm | G 1/2" | 13,5 | 57,5 | 88,0 | 94,0 | 203,0 | 53,0 | 80 | 75 |
| **K- 07 40 55 01** | 63 mm | G 3/4 | 14,5 | 57,5 | 88,0 | 94,0 | 203,0 | 54,0 | 80 | 75 |
| **K- 07 40 55 03** | 63 mm | G 1 | 17,5 | 57,5 | 88,0 | 94,0 | 203,0 | 56,5 | 80 | 75 |

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*