


K-T-STECK VB 80-100 INFI

T-push-in connector \varnothing 80 mm/ \varnothing 110 mm

HANSA FLEX

Properties

Media	Compressed air, vacuum, inert gases
Operating pressure	-0,99 bar - 15 bar
Temp. range	-20 °C to +80 °C
Guide ring	Technopolymer
Housing	Aluminium, treated surface
Allen screw	Galvanised steel
Clamp ring	Stainless steel 1.4301
Nut	Aluminium, surface treated
O-ring	NBR
Self-locking nut	Galvanised steel
Locking ring	Technopolymer

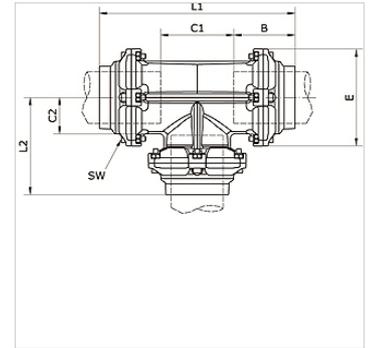

Item

Identification	External pipe \varnothing	B (mm)	C1 (mm)	C2 (mm)	E (mm)	L1 (mm)	L2 (mm)	AF (mm)
K- 07 40 55 16	80 - 80 - 80 mm	91,0	109,0	54,5	145,0	291,5	138,0	6
K- 07 40 54 67	110 - 110 - 110 mm	125,5	150,5	75,0	200,0	401,0	200,5	8