


# K-VERTEILER 3-FACH HANSA PRO

Distributor 3-fold with pressure switch, HANSA PRO

**HANSA FLEX**

## Properties

<b>Media temperature</b>	-10 °C to +50 °C
<b>Ambient temperature</b>	-10 °C to +50 °C
<b>Media</b>	Compressed air
<b>Mounting type</b>	Line mounting, mounting kit or wall mounting
<b>Installation position</b>	Any
<b>Adjustment range</b>	0,3 - 2 bar
<b>Nominal flow-rate G1/2</b>	11.000 l/min (P1 = 6 bar/Delta P = 1 bar)
<b>Nominal flow-rate G 3/8</b>	7.250 l/min (P1 = 6 bar/Delta P = 1 bar)
<b>standard nominal flow rate rear (P – E)</b>	2.250 l/min (P1 = 6 bar/Delta P = 1 bar)
<b>standard nominal flow rate top (P – D)</b>	2.250 l/min (P1 = 6 bar/Delta P = 1 bar)
<b>standard nominal flow rate bottom (P – B)</b>	5.500 l/min (P1 = 6 bar/Delta P = 1 bar)
<b>standard nominal flow rate front (P – C)</b>	2.250 l/min (P1 = 6 bar/Delta P = 1 bar)
<b>PE max 11</b>	16 bar
<b>Housing</b>	PA66

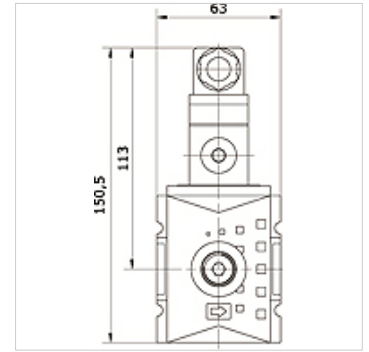

## Item

Identification	Port P + A	Port B	Port C	Port D	Port E	Burst pressure (bar)	Size
K- 07 25 22 38	G 3/8 i	G 1/2 i	G 3/8 i	G 1/4 i	G 3/8 i	5	2
K- 07 25 22 39	G 3/8 i	G 1/2 i	G 3/8 i	G 1/4 i	G 3/8 i	10	2
K- 07 25 22 40	G 3/8 i	G 1/2 i	G 3/8 i	G 1/4 i	G 3/8 i	20	2
K- 07 25 22 41	G 3/8 i	G 1/2 i	G 3/8 i	G 1/4 i	G 3/8 i	25	2
K- 07 25 22 42	G 1/2 i	G 1/2 i	G 3/8 i	G 1/4 i	G 3/8 i	5	2
K- 07 25 22 43	G 1/2 i	G 1/2 i	G 3/8 i	G 1/4 i	G 3/8 i	10	2
K- 07 25 22 44	G 1/2 i	G 1/2 i	G 3/8 i	G 1/4 i	G 3/8 i	20	2
K- 07 25 22 45	G 1/2 i	G 1/2 i	G 3/8 i	G 1/4 i	G 3/8 i	25	2