# K-VERTEILER 4-FACH HANSA PRO


Distributor 4-fold, HANSA PRO

HANSA FLEX

## Properties

| | |
|---|---|
| **Media temperature** | -10 °C to +50 °C |
| **Ambient temperature** | -10 °C to +50 °C |
| **Media** | Compressed air |
| **Mounting type** | Line mounting, mounting kit or wall mounting |
| **Installation position** | Any |
| **Nominal flow-rate G1/2** | 11.000 l/min (P1 = 6 bar/Delta P = 1 bar) |
| **Nominal flow-rate G 3/8** | 7.250 l/min (P1 = 6 bar/Delta P = 1 bar) |
| **standard nominal flow rate rear (P – E)** | 2.250 l/min (P1 = 6 bar/Delta P = 1 bar) |
| **standard nominal flow rate top (P – D)** | 2.250 l/min (P1 = 6 bar/Delta P = 1 bar) |
| **standard nominal flow rate bottom (P – B)** | 5.500 l/min (P1 = 6 bar/Delta P = 1 bar) |
| **standard nominal flow rate front (P – C)** | 2.250 l/min (P1 = 6 bar/Delta P = 1 bar) |
| **PE max 11** | 16 bar |
| **Housing** | PA66 |



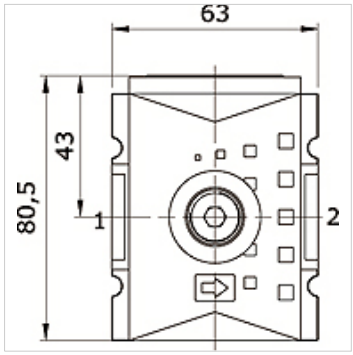


## Item

| Identification | Port P + A | Port B | Port C | Port D | Port E | Size |
|---|---|---|---|---|---|---|
| **K- 07 25 22 46** | G 3/8 i | G 1/2 i | G 3/8 i | G 1/4 i | G 3/8 i | 2 |
| **K- 07 25 22 47** | G 1/2 i | G 1/2 i | G 3/8 i | G 1/4 i | G 3/8 i | 2 |

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*