


K-W90 STECK VB 80-100 INFI

90°-elbow push-in connector Ø 80 mm/Ø 110 mm



| Properties | |
|--------------------|-------------------------------------|
| Media | Compressed air, vacuum, inert gases |
| Operating pressure | -0,99 bar - 15 bar |
| Temp. range | -20 °C to +80 °C |
| Guide ring | Technopolymer |
| Housing | Aluminium, treated surface |
| Clamp ring | Stainless steel 1.4301 |
| Nut | Aluminium, surface treated |
| O-ring | NBR |
| Self-locking nut | Galvanised steel |
| Locking ring | Technopolymer |

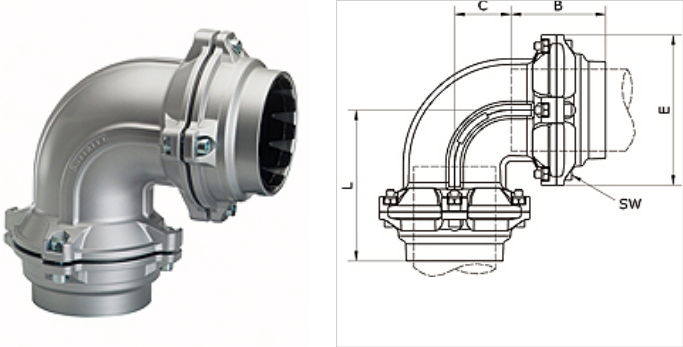

| Item | | | | | | |
|----------------|-----------------|-----------|-----------|-----------|-----------|------------|
| Identification | External pipe Ø | B (mm) | C (mm) | E (mm) | L (mm) | AF (mm) |
| K- 07 40 55 15 | 80 - 80 mm | 91,0 | 54,5 | 145,0 | 146,0 | 6 |
| K- 07 40 54 66 | 110 - 110 mm | 125,5 | 75,0 | 200,0 | 200,5 | 8 |