
K-PNEUMA KOMPAKTSCHLITTEN MXS

Air Slide Table MXS

HANSA-FLEX

Properties

Max. working pressure	0,7 MPa
min. working pressure	0.15 MPa
Damping	elastic stop
Operating principle	double working
Test pressure	1,05 MPa
Media temperature	-10 °C to +60 °C
Ambient temperature	-10 °C to +60 °C
piston rod speed	50 to 500 mm/s
Media	Compressed air
Series	MXS
More information	Carriage and air cylinder as a complete unit Ideal for precision assembly applications High resistance to the cultivation of loads

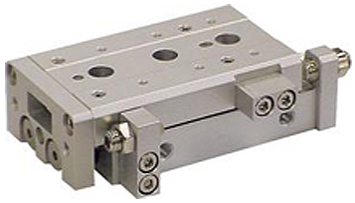

Description

Compact air slide table, series MXS, slide table and air cylinder as complete unit, ideal for precise installation applications, high resistance capacity when building up loads, with stroke limiting unit or shock absorber, (order separately), no stroke adjustment, double action, piston diameter / stroke: 20/100 mm, connection size: G 1/8

Item

Identification	Ø piston (mm)	Stroke (mm)	Pneumatic Port	Weight (kg)
K- 07 55 01 46	6	10	M 3	0,080
K- 07 55 01 47	6	20	M 3	0,100
K- 07 55 01 48	6	30	M 3	0,115
K- 07 55 01 49	6	40	M 3	0,155
K- 07 55 01 50	6	50	M 3	0,180
K- 07 55 01 52	8	10	M 5	0,150
K- 07 55 01 53	8	20	M 5	0,160
K- 07 55 01 54	8	30	M 5	0,190
K- 07 55 01 55	8	40	M 5	0,235
K- 07 55 01 56	8	50	M 5	0,285
K- 07 55 01 57	8	75	M 5	0,410
K- 07 55 01 27	12	10	M 5	0,325
K- 07 55 01 29	12	20	M 5	0,325
K- 07 55 01 30	12	30	M 5	0,325
K- 07 55 01 31	12	40	M 5	0,385
K- 07 55 01 32	12	50	M 5	0,485
K- 07 55 01 33	12	75	M 5	0,660
K- 07 55 01 28	12	100	M 5	0,890
K- 07 55 01 35	16	10	M 5	0,570
K- 07 55 01 38	16	20	M 5	0,570
K- 07 55 01 39	16	30	M 5	0,580
K- 07 55 01 40	16	40	M 5	0,640
K- 07 55 01 41	16	50	M 5	0,760
K- 07 55 01 42	16	75	M 5	1,090
K- 07 55 01 36	16	100	M 5	0,770
K- 07 55 01 37	16	125	M 5	0,900
K- 07 55 00 01	20	10	G 1/8	0,960
K- 07 55 00 05	20	20	G 1/8	0,980
K- 07 55 00 06	20	30	G 1/8	1,010
K- 07 55 00 07	20	40	G 1/8	1,100
K- 07 55 00 08	20	50	G 1/8	1,250
K- 07 55 00 09	20	75	G 1/8	-
K- 07 55 00 02	20	100	G 1/8	2,150
K- 07 55 00 03	20	125	G 1/8	2,670
K- 07 55 00 04	20	150	G 1/8	3,190

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.

K-PNEUMA KOMPAKTSCHLITTEN MXS

Air Slide Table MXS

HANSA-FLEX

Item

Identification	Ø piston (mm)	Stroke (mm)	Pneumatic Port	Weight (kg)
K- 07 55 00 10	25	10	G 1/8	1,660
K- 07 55 00 14	25	20	G 1/8	1,680
K- 07 55 00 15	25	30	G 1/8	1,690
K- 07 55 00 16	25	40	G 1/8	1,840
K- 07 55 00 17	25	50	G 1/8	2,090
K- 07 55 00 18	25	75	G 1/8	2,650
K- 07 55 00 11	25	100	G 1/8	3,270
K- 07 55 00 12	25	125	G 1/8	4,140
K- 07 55 00 13	25	150	G 1/8	4,170

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.