


K-T-RINGSTUECK

T-ring nipples



Properties

| | |
|-----------------------|---------------------|
| Working pressure | Max. 16 bar |
| Operating temperature | -20 °C to +70 °C |
| Material | Nickel-plated brass |
| Contact pressure ring | Hostaform |
| Clamping ring | Stainless steel |

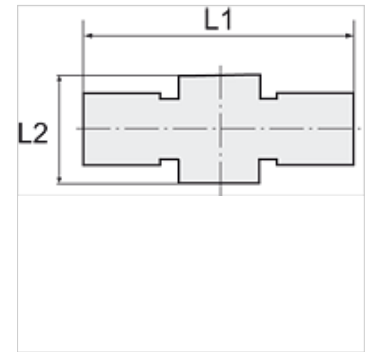

Note

Further information on request

Description

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

| Item | | | | |
|----------------|------------------|---------------------|------------|------------|
| Identification | for hollow screw | for external hose Ø | L1 (mm) | L2 (mm) |
| K- 07 40 26 93 | M 5 | 4 mm | 36,0 | 9,0 |
| K- 07 40 26 97 | G 1/8 | 4 mm | 42,0 | 15,0 |
| K- 07 40 26 98 | G 1/8 | 6 mm | 46,0 | 15,0 |
| K- 07 40 26 99 | G 1/8 | 8 mm | 49,0 | 15,0 |
| K- 07 40 26 95 | G 1/4 | 6 mm | 48,0 | 17,0 |
| K- 07 40 26 96 | G 1/4 | 8 mm | 52,0 | 17,0 |
| K- 07 40 26 94 | G 1/4 | 10 mm | 52,0 | 17,0 |
| K- 07 40 27 02 | G 3/8 | 8 mm | 54,0 | 20,0 |
| K- 07 40 27 00 | G 3/8 | 10 mm | 56,0 | 20,0 |
| K- 07 40 27 01 | G 3/8 | 12 mm | 58,0 | 20,0 |