


K-DBV MANO 1/2"

Pressure limiting valves size 1/2"

Properties

| | |
|----------------------------|--|
| Design | Spring-loaded, non-return diaphragm valve with adjustable opening pressure |
| Media temperature | max. 60 °C |
| Ambient temperature | Max. 60 °C |
| Sealant | NBR |
| Spring bonnet | POM/brass |
| Housing | Die-cast zinc, painted silver |
| Diaphragm | NBR |

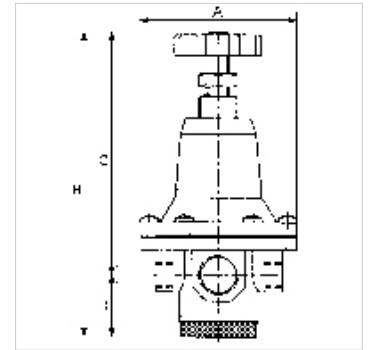

Note

Further information on request

Description

Manually adjustable overflow valves. For protecting pneumatic systems against damage caused by excess pressure.

Item

| Identification | Thread | Control range | A (mm) | B | C (mm) | D (mm) |
|----------------|--------|----------------|-----------|----------|-----------|-----------|
| K- 07 25 01 97 | G 1/2 | 0.5 - 3.0 bar | 82,0 | 162.0 mm | 129,0 | 33,0 |
| K- 07 25 01 98 | G 1/2 | 0.5 - 5.5 bar | 82,0 | 162.0 mm | 129,0 | 33,0 |
| K- 07 25 01 99 | G 1/2 | 0.5 - 10.0 bar | 82,0 | 162.0 mm | 129,0 | 33,0 |

Spare parts

| | |
|------------------------------------|--|
| K-HALTERBAUSATZ STANDARD | Holder |
| K-GERAETESTECKER | Coupling socket |
| K-SCHALLDAE SINTERBR AG 569 | Silencers, sintered bronze, flat type with male thread, 569 Series |
| K-VERSCHLEI-SATZ | Set of wearing parts |
| K-KM MS | Hexagonal lock nuts, brass |