# K-DBV MANO 1/2"

Pressure limiting valves size 1/2

## Properties

| | |
|---|---|
| **Design** | Spring-loaded, non-return diaphragm valve with adjustable opening pressure |
| **Media temperature** | max. 60 °C |
| **Ambient temperature** | Max. 60 °C |
| **Sealant** | NBR |
| **Spring bonnet** | POM/brass |
| **Housing** | Die-cast zinc, painted silver |
| **Diaphragm** | NBR |



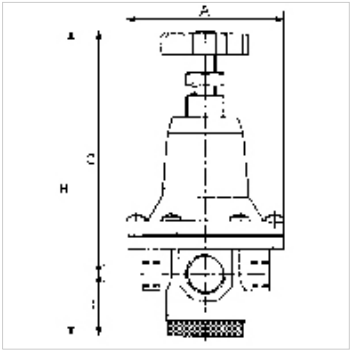


## Note

Further information on request

## Description

Manually adjustable overflow valves.For protecting pneumatic systems against damage caused by excess pressure.

## Item

| Identification | Thread | Control range | A (mm) | B | C (mm) | D (mm) |
|---|---|---|---|---|---|---|
| **K- 07 25 01 97** | G 1/2 | 0.5 - 3.0 bar | 82,0 | 162.0 mm | 129,0 | 33,0 |
| **K- 07 25 01 98** | G 1/2 | 0.5 - 5.5 bar | 82,0 | 162.0 mm | 129,0 | 33,0 |
| **K- 07 25 01 99** | G 1/2 | 0.5 - 10.0 bar | 82,0 | 162.0 mm | 129,0 | 33,0 |

## Spare parts

| | |
|---|---|
| **K-HALTERBAUSATZ STANDARD** | Holder |
| **K-GERAETESTECKER** | Coupling socket |
| **K-SCHALLDAE SINTERBR AG 569** | Silencers, sintered bronze, flat type with male thread, 569 Series |
| **K-VERSCHLEI-SATZ** | Set of wearing parts |
| **K-KM MS** | Hexagonal lock nuts, brass |

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*