
K-DBV MANO 1/2"

Pressure limiting valves size 1/2

Properties

Design	Spring-loaded, non-return diaphragm valve with adjustable opening pressure
Media temperature	max. 60 °C
Ambient temperature	Max. 60 °C
Sealant	NBR
Spring bonnet	POM/brass
Housing	Die-cast zinc, painted silver
Diaphragm	NBR



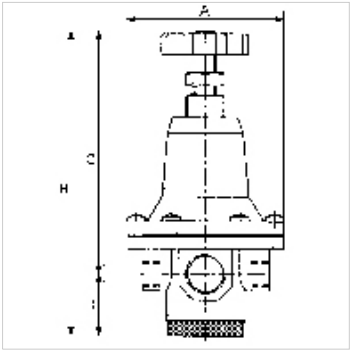

Note

Further information on request

Description

Manually adjustable overflow valves.For protecting pneumatic systems against damage caused by excess pressure.

Item

Identification	Thread	Control range	A (mm)	B	C (mm)	D (mm)
K- 07 25 01 97	G 1/2	0.5 - 3.0 bar	82,0	162.0 mm	129,0	33,0
K- 07 25 01 98	G 1/2	0.5 - 5.5 bar	82,0	162.0 mm	129,0	33,0
K- 07 25 01 99	G 1/2	0.5 - 10.0 bar	82,0	162.0 mm	129,0	33,0

Spare parts

K-HALTERBAUSATZ STANDARD	Holder
K-GERAETESTECKER	Coupling socket
K-SCHALLDAE SINTERBR AG 569	Silencers, sintered bronze, flat type with male thread, 569 Series
K-VERSCHLEI-SATZ	Set of wearing parts
K-KM MS	Hexagonal lock nuts, brass

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.