



# K-T AG-K ISO 7-1 2 SCH

Male branch tees, conical male thread acc. to ISO 7-1

**HANSA FLEX**

## Properties

|                  |                     |
|------------------|---------------------|
| Working pressure | Max. 18 bar         |
| Sealant          | Buna-N              |
| Material         | Nickel-plated brass |

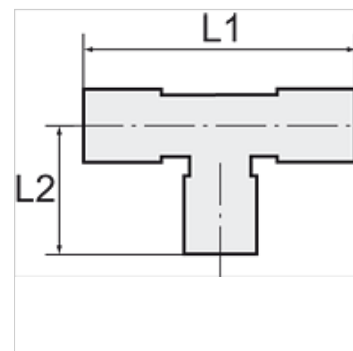

## Note

Further information on request

| Item           |        |               |            |            |       |
|----------------|--------|---------------|------------|------------|-------|
| Identification | Thread | for hose      | L1<br>(mm) | L2<br>(mm) | AF    |
| K- 07 40 31 87 | R 1/8  | 4 mm / 2 mm   | 49,0       | 16,0       | 9 mm  |
| K- 07 40 31 88 | R 1/8  | 5 mm / 3 mm   | 43,0       | 17,0       | 8 mm  |
| K- 07 40 31 89 | R 1/8  | 6 mm / 4 mm   | 44,0       | 17,0       | 9 mm  |
| K- 07 40 31 90 | R 1/8  | 8 mm / 6 mm   | 44,0       | 17,0       | 10 mm |
| K- 07 40 31 86 | R 1/8  | 10 mm / 8 mm  | 51,0       | 18,5       | 11 mm |
| K- 07 40 31 84 | R 1/4  | 6 mm / 4 mm   | 44,0       | 20,0       | 9 mm  |
| K- 07 40 31 85 | R 1/4  | 8 mm / 6 mm   | 44,0       | 20,0       | 12 mm |
| K- 07 40 31 83 | R 1/4  | 10 mm / 8 mm  | 50,0       | 21,0       | 12 mm |
| K- 07 40 31 93 | R 3/8  | 8 mm / 6 mm   | 46,0       | 22,0       | 12 mm |
| K- 07 40 31 91 | R 3/8  | 10 mm / 8 mm  | 50,0       | 22,0       | 12 mm |
| K- 07 40 31 92 | R 3/8  | 12 mm / 10 mm | 62,0       | 24,0       | 17 mm |
| K- 07 40 31 81 | R 1/2  | 10 mm / 8 mm  | 57,0       | 28,0       | 17 mm |
| K- 07 40 31 82 | R 1/2  | 12 mm / 10 mm | 62,0       | 26,0       | 17 mm |