


K-TL-STECK VERS DRE MINI PAR

Male branch tee, swivel type, mini, parallel thread

HANSA FLEX

Properties

Working pressure	Max. 10 bar, vacuum
Application	Air, vacuum
Recommended hoses	PU or PA (nylon)
Media	Compressed air
Standard	M thread acc. to DIN 13-1, with O-Ring G thread acc. to DIN EN ISO 228-1, with O-Ring R thread acc. to ISO 7-1, thread coating
Temp. range	0 °C to +60 °C
Sealing surface	O-ring (NBR)
Material	Plastic, Nickel plated brass
Contact pressure ring	Plastic

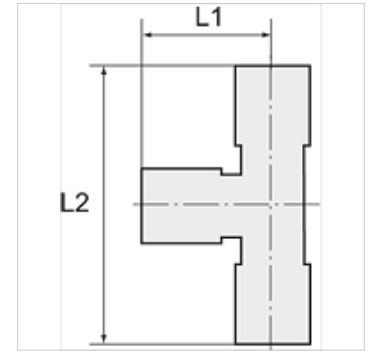

Note

Further information on request

Description

Push-in fittings series manufactured in plastic and nickel-plated brass, space-saving miniature design.

Item	Identification	Thread	for external hose Ø	L1 (mm)	L2 (mm)	AF
	K- 07 40 23 28	M 3	3 mm	12,0	28,0	8 mm
	K- 07 40 23 29	M 3	4 mm	14,0	31,2	8 mm
	K- 07 40 23 30	M 5	3 mm	12,0	28,0	8 mm
	K- 07 40 23 31	M 5	4 mm	14,0	31,2	8 mm
	K- 07 40 23 32	M 5	6 mm	14,5	32,7	8 mm
	K- 07 40 23 33	M 6	3 mm	12,0	28,5	10 mm
	K- 07 40 23 34	M 6	4 mm	14,0	31,6	10 mm
	K- 07 40 23 35	M 6	6 mm	14,5	33,1	10 mm
	K- 07 40 23 36	G 1/8	4 mm	14,0	30,5	13 mm
	K- 07 40 23 37	G 1/8	6 mm	16,0	32,5	13 mm
	K- 07 40 23 38	R 1/8	4 mm	14,0	32,0	10 mm
	K- 07 40 23 39	R 1/8	6 mm	14,5	33,5	10 mm