
HK RH
Non return valve RH

Properties

Design	Ball locking Type "V" with vale spool pilot-controlled - single-acting
Material	Housing: Galvanised steel Inside parts of steel
Operating pressure	max. 700 bar



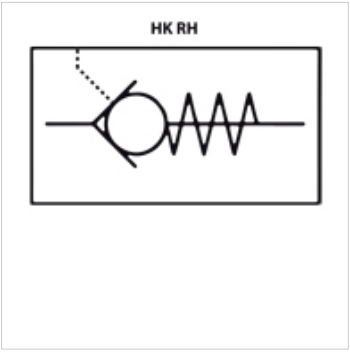

Description

Type HK RH *** V with pre-release, a polished seat valve spool is used with ball check valve. This will pre-opened when unlock, the throttle effect allows a bumpless relaxation of oil volume. Mainly used for high operating pressures and high flow rates.
Pilot pressure ratio see diagram

Item

Identification	p max. (bar)	Q max. (L/min)	A (mm)	B (mm)	G	L (mm)	AF (mm)	Weight (kg)
HK RH 1	700	15	31,5	27	G 1/4”	84	24	0,40
HK RH 2	700	35	32,0	29	G 3/8”	90	27	0,40
HK RH 3	500	55	36,5	31	G 1/2”	100	32	0,60
HK RH 3V	500	55	36,5	31	G 1/2”	100	32	0,60
HK RH 4	500	100	45,0	36	G 3/4”	126	41	1,30
HK RH 4V	500	100	45,0	36	G 3/4”	126	41	1,30

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.