

HK DRH

Non return valve RB


HANSA FLEX

Properties

Design Ball locking
pilot-controlled - double-acting

Material Housing: Galvanised steel
Inside parts of steel

Operating pressure max. 500 bar

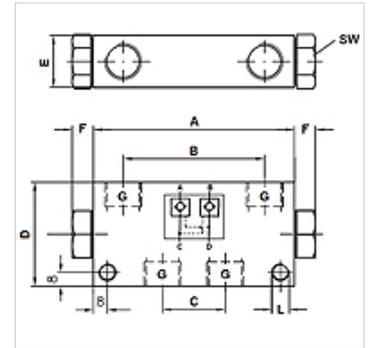

Item

Identification	p max. (bar)	Level control ratio	Q max. (L/min)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	G	L (mm)	AF (mm)	Weight (kg)
HK DRH 1	500	1:2.5	16	70	50	28,0	45	20	G 1/4"	6	19	0,50
HK DRH 2	500	1:2.5	30	89	63	36,0	60	30	G 3/8"	8	22	1,20
HK DRH 3	500	1:2.5	60	115	81	36,0	60	30	G 1/2"	10	27	1,60
HK DRH 4	400	1:2.5	90	150	106	55,0	70	40	G 3/4"	10	32	2,90