


### Properties

Application	Agricultural technology
Industry	
Connection 1	metric cylindrical outer thread
Sealing form 1	24° inner cone
Standard	complies with ISO 7241 series A
Operating pressure	max. 250 bar
Volumetric flow	max. 240 l/min, in combination with SKS Agrar
Temp. range	-30 °C to +100 °C
Material	Steel
Surface	electro galvanised

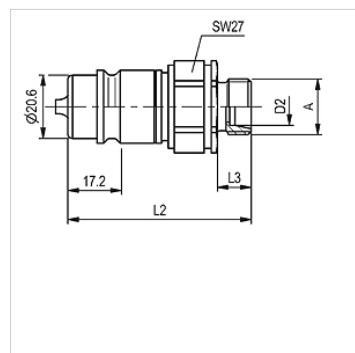

### Note

With standard threaded connections in determining the operating pressure of the maximum rated pressure is taken into account.

### Description

The consistent refinement of this plug fulfils the extreme requirements demanded in practice.

### Item

Identification	DN*	Series	for external pipe Ø (mm)	Connecting thread	L1 (mm)	L2 (mm)	Size	SF coup.*	Weight (kg)
SKS 10 HL 3 AGRAR	10	L	12	M 18x1,5	60,0	11,0	3	4	0,109
SKS 13 HL 3 AGRAR	12	L	15	M 22x1,5	61,0	12,0	3	4	0,117
SKS 16 HL 3 AGRAR	16	L	18	M 26x1,5	61,0	12,0	3	4	0,119

DN = Nominal diameter, nominal width – SF gek. = Safety factor coupled

### Accessories

**SKS ZUBS** Dust protection coupling connector, SKS..