


### Properties

<b>Design</b>	U-ring
<b>Operating pressure</b>	up to 400 bar
<b>Sliding speed max.</b>	0,5 m/s
<b>Temp. min.</b>	-30 °C
<b>Temp. max.</b>	80 °C
<b>Media</b>	Mineral oils
<b>Installation</b>	in closed grooves A in open grooves B on a B or multi-part A piston
<b>Material</b>	PUR
<b>Application</b>	Hydraulics



Druck bar	Spaltmaß / Clearance e (mm)	
	d < 60 mm	d > 60 mm
50	< 0,40	< 0,50
100	< 0,30	> 0,40
200	< 0,20	> 0,30
300	< 0,15	> 0,20
400	< 0,10	> 0,15

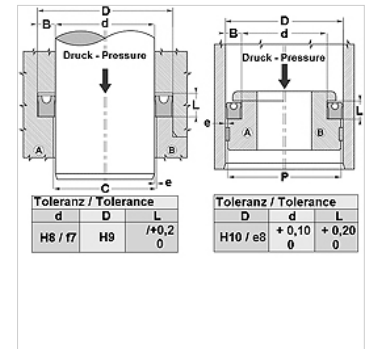

### Note

Dimensions see page Rod seals ...

### Description

For rods and pistons.  
High abrasion resistance.  
Use for new designs TS, TS-L, RS-L and EU profiles (rod seals).

### Ordering information

We are able to produce seals with diameters of 20 to 510 mm with short lead times.

### Item

Identification	d (mm)	D (mm)	L (mm)
MU 09 03	3,00	9,0	5,0