


### Properties

<b>Scope of supply</b>	1 measuring device HK MH 2025
	1 USB-power supply unit 5 VDC, 500 mA
	2 NiMH rechargeable batteries
	2 pressure sensors with moulded cable (length 2.5 m), pressure ranges, see table
	2 MINIMESS® direct connectors for pressure sensors
	Software
	Operating manual
	Plastic case
<b>Temp. range</b>	-20 °C to +70 °C

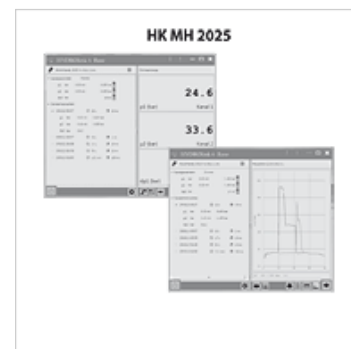

### Description

Compact measuring device  
 Direct handling by 5 softkeys  
 2 channels for industrial sensors (optional 0-20 mA, 4-20 mA, 0-10 V, 2-10 V, frequency, counter)  
 Calculation of differential pressure or power from 2 channels  
 ISDS automatic sensor detection  
 LCD graphic display with switched-mode backlight and automatic display adjustment  
 2,0 MB memory (5 series of measurements with 120,000 measured values)  
 Scanning rate selectable in 5 stages between 1 ms and 10 s  
 Display rate selectable between 0,5 ms and 10 ms  
 High-speed data transmission to the PC via USB interface  
 With software HYDROlink Base  
 Lightweight plastic housing with battery compartment for commercially available NiMH rechargeable batteries  
 Case dimensions: W=235 mm / L=185 mm / H=48 mm

### Item

Identification	Pressure sensors included	Weight (kg)
HK MH2025 400 400	2x 0 - 400 bar	3,5
HK MH2025 060 600	1x 0 - 60 bar/1x 0 - 600 bar	3,5

### Accessories

HK PT2020	Pressure sensor
-----------	-----------------