


### Properties

#### Scope of supply

1 measuring device HK MH 2025  
1 USB-power supply unit 5 VDC, 500 mA  
2 NiMH rechargeable batteries  
2 pressure sensors with moulded cable (length 2.5 m), pressure ranges, see table  
2 MINIMESS® direct connectors for pressure sensors  
Software  
Operating manual  
Plastic case

**Temp. range** -20 °C to +70 °C

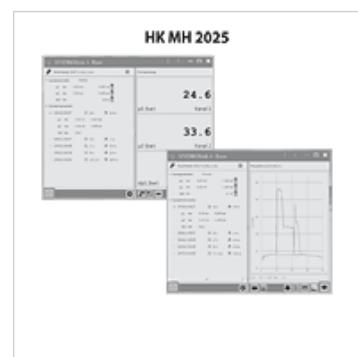

### Description

Compact measuring device

Direct handling by 5 softkeys

2 channels for industrial sensors (optional 0-20 mA, 4-20 mA, 0-10 V, 2-10 V, frequency, counter)

Calculation of differential pressure or power from 2 channels

ISDS automatic sensor detection

LCD graphic display with switched-mode backlight and automatic display adjustment

2,0 MB memory (5 series of measurements with 120,000 measured values)

Scanning rate selectable in 5 stages between 1 ms and 10 s

Display rate selectable between 0,5 ms and 10 ms

High-speed data transmission to the PC via USB interface

With software HYDROlink Base

Lightweight plastic housing with battery compartment for commercially available NiMH rechargeable batteries

Case dimensions: W=235 mm / L=185 mm / H=48 mm

### Item

Identification	Pressure sensors included	Weight (kg)
HK MH2025 400 400	2x 0 - 400 bar	3,5
HK MH2025 060 600	1x 0 - 60 bar/1x 0 - 600 bar	3,5

### Accessories

HK PT2020 Pressure sensor