


# HK PN2070

Pressure sensor controller PN2070

**HANSA FLEX**

## Properties

Operating temperature max.	80 °C
Connection	G 1/4" female, rotatable
Operating voltage	24 V DC
Electrical connection	Round plug connector M 12 x 1, 4-pol.
Material	Housing: Stainless steel V2A Parts in contact with media: Stainless steel V2A
Scope of supply	without plug
protection class	IP 65

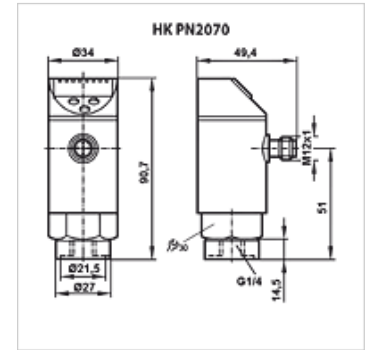

## Description

Compact unit comprising pressure switch, pressure sensor and LED indicator  
2-color display red / green for visualizing the process status  
3-key operation according to VDMA Standard  
Output: 2x PNP (freely programmable, NC/NO, window/hysteresis)  
1 output can be set as an analogue output (0-10 V / 4-20 mA, scalable 1:4)  
IO-link interface  
Accuracy  $\pm 0.5$  % of range limit value  
Min./max. value memory

## Item

Identification	Measuring range	Weight (kg)
HK PN2070 PN400 SER	0 to 400 bar	0,3

## Accessories

HK DSR 4POL M12 4-pin angle plug with cable