


# FI MD GEH

High pressure filter 400bar

**HANSA FLEX**

## Properties

<b>Design</b>	without bypass valve, without clogging indicator
<b>Temp. min.</b>	-10 °C
<b>Temp. max.</b>	120 °C
<b>Material</b>	Filter head of GGG
<b>Operating pressure</b>	up to 315 bar
<b>Scope of supply</b>	without filter element

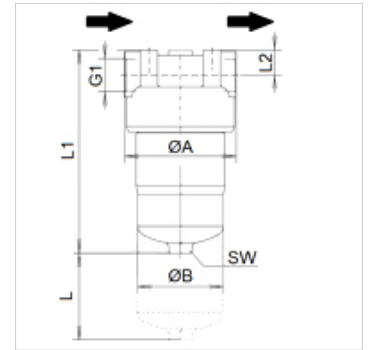

## Note

Dimension "L": clearance required for changing the filter element

## Description

Pressure filter for pipeline installation

Connector for clogging indicator M20 x 1.5 sealed with bolt

## Ordering information

Filter element is not included. Please order separately.

## Item

Identification	for filter type	G1	L (mm)	L1 (mm)	L2 (mm)	Ø A (mm)	Ø B (mm)	BD (bar)	AF (mm)	Weight (kg)
FI MD GEH N 040 050 G12	FI MD 040, 050	G 1/2"	80,0	189,0	31,0	92,0	66,0	315	27	3,60
FI MD GEH N 060 075 G34	FI MD 060, 080	G 3/4"	80,0	267,0	31,0	92,0	66,0	315	27	3,90
FI MD GEH N 080 090 G34	FI MD 080, 090	G 3/4"	80,0	343,0	31,0	92,0	66,0	315	27	5,10
FI MD GEH N 170 190 G114	FI MD 170, 190	G 1.1/4"	110,0	257,0	32,0	142,0	109,0	210	27	8,50
FI MD GEH N 240 260 G114	FI MD 240, 260	G 1.1/4"	110,0	371,0	32,0	142,0	109,0	210	30	15,30

BD = Working pressure

## Accessories

HK VA PIS M Clogging indicator mechanical

HK VA PIS EL Clogging indicator electrical

## Spare part for following products

FI MD 315 Medium pressure filter 315 bar

## Additional elements

FI HD E MA Filter element for high-pressure filter MA