
FI MD GEH
High pressure filter 400bar

Properties

Design	without bypass valve, without clogging indicator
Temp. min.	-10 °C
Temp. max.	120 °C
Material	Filter head of GGG
Operating pressure	up to 315 bar
Scope of supply	without filter element



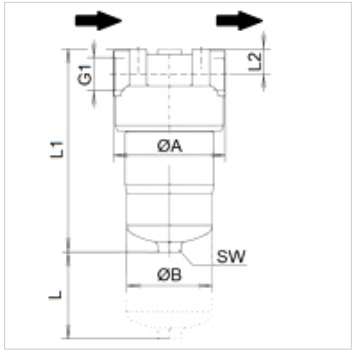

Note
Dimension “L”: clearance required for changing the filter element

Description
Pressure filter for pipeline installation
Connector for clogging indicator M20 x 1.5 sealed with bolt

Ordering information
Filter element is not included. Please order separately.

Item

Identification	for filter type	G1	L (mm)	L1 (mm)	L2 (mm)	Ø A (mm)	Ø B (mm)	BD (bar)	AF (mm)	Weight (kg)
FI MD GEH N 040 050 G12	FI MD 040, 050	G 1/2”	80,0	189,0	31,0	92,0	66,0	315	27	3,60
FI MD GEH N 060 075 G34	FI MD 060, 080	G 3/4”	80,0	267,0	31,0	92,0	66,0	315	27	3,90
FI MD GEH N 080 090 G34	FI MD 080, 090	G 3/4”	80,0	343,0	31,0	92,0	66,0	315	27	5,10
FI MD GEH N 170 190 G114	FI MD 170, 190	G 1.1/4”	110,0	257,0	32,0	142,0	109,0	210	27	8,50
FI MD GEH N 240 260 G114	FI MD 240, 260	G 1.1/4”	110,0	371,0	32,0	142,0	109,0	210	30	15,30

BD = Working pressure

Accessories

HK VA PIS M	Clogging indicator mechanical
HK VA PIS EL	Clogging indicator electrical

Spare part for following products

FI MD 315	Medium pressure filter 315 bar

Additional elements

FI HD E MA	Filter element for high-pressure filter MA

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.