

HK 055 211

Check valve SC, single-acting

Properties

Design	Cone locking pilot-controlled - single-acting Seat version - leak-free
Material	Housing: Aluminium Inside parts of steel
Operating pressure	max. 350 bar

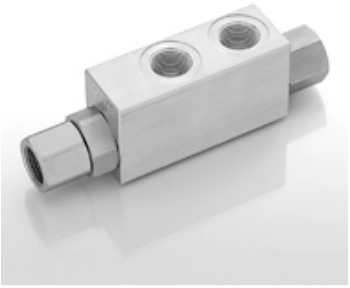

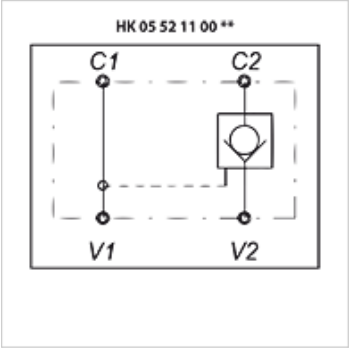

Item

Identification	Thread	Opening pressure (bar)	Level control ratio	Q max. (L/min)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	H (mm)	Weight (kg)
HK 055 211 000 300	G 1/2”	1,0	1:3.2	50	95	35	50	38,5	25	32	38	0,70
HK 055 211 000 900	G 1/4”	2,0	1:4	20	70	35	40	33,5	0	24	35	0,36

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.