
HK 055 283

Check valve SC, single-acting with venting

Properties

Design	Cone locking pilot-controlled - single-acting Seat version - leak-free vented control range
Material	Housing: Aluminium Inside parts of steel
Operating pressure	max. 350 bar



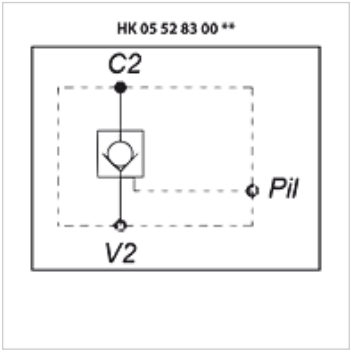

Item

Identification	Thread	Opening pressure (bar)	Level control ratio	Q max. (L/min)	Weight (kg)
HK 055 283 000 200	G 3/8”	1,0	1:10	30	0,62
HK 055 283 000 201	G 3/8”	4,5	1:10	30	0,62

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.