


HK 055 283

Check valve SC, single-acting with venting



Properties

| | |
|--------------------|--|
| Design | Cone locking pilot-controlled - single-acting Seat version - leak-free vented control range |
| Material | Housing: Aluminium Inside parts of steel |
| Operating pressure | max. 350 bar |

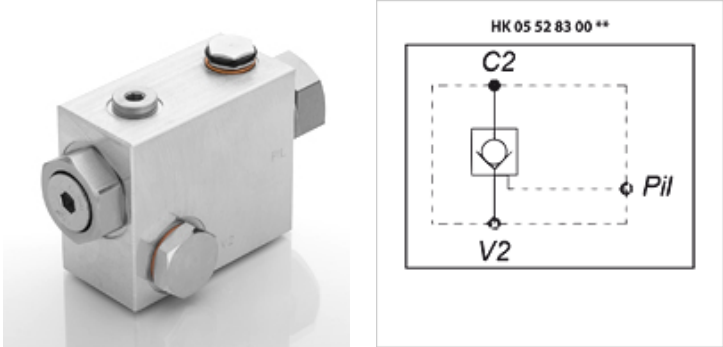

| Item | | | | | |
|--------------------|--------|---------------------------|---------------------|-------------------|----------------|
| Identification | Thread | Opening pressure (bar) | Level control ratio | Q max. (L/min) | Weight (kg) |
| HK 055 283 000 200 | G 3/8" | 1,0 | 1:10 | 30 | 0,62 |
| HK 055 283 000 201 | G 3/8" | 4,5 | 1:10 | 30 | 0,62 |