

HK 055 283

Check valve SC, single-acting with venting


HANSA FLEX

Properties

Design Cone locking
pilot-controlled - single-acting
Seat version - leak-free
vented control range

Material Housing: Aluminium
Inside parts of steel

Operating pressure max. 350 bar

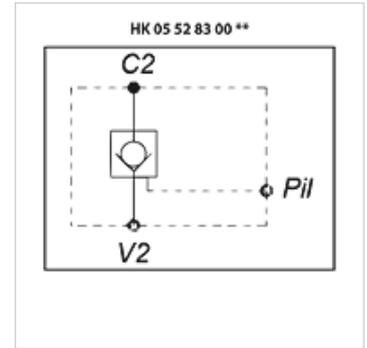

Item

Identification	Thread	Opening pressure (bar)	Level control ratio	Q max. (L/min)	Weight (kg)
HK 055 283 000 200	G 3/8"	1,0	1:10	30	0,62
HK 055 283 000 201	G 3/8"	4,5	1:10	30	0,62