
SCHRAUBE M VZ

Hexagon socket screw

Properties

Design	Hexagon socket screw
Standard	DIN 912 (ISO 4762)
Material	Steel 10.9
Surface	galvanised (tempered)



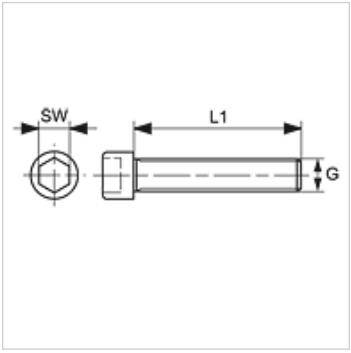

Item

Identification	G	L1 (mm)	AF (mm)
SCHRAUBE M 08-25 VZ	M 8	25	6
SCHRAUBE M 08-30 VZ	M 8	30	6
SCHRAUBE M 08-35 VZ	M 8	35	6
SCHRAUBE M 08-40 VZ	M 8	40	6
SCHRAUBE M 10-30 VZ	M 10	30	8
SCHRAUBE M 10-35 VZ	M 10	35	8
SCHRAUBE M 10-40 VZ	M 10	40	8
SCHRAUBE M 10-45 VZ	M 10	45	8
SCHRAUBE M 10-50 VZ	M 10	50	8
SCHRAUBE M 12-35 VZ	M 12	35	10
SCHRAUBE M 12-40 VZ	M 12	40	10
SCHRAUBE M 12-45 VZ	M 12	45	10
SCHRAUBE M 12-50 VZ	M 12	50	10
SCHRAUBE M 12-55 VZ	M 12	55	10
SCHRAUBE M 12-60 VZ	M 12	60	10
SCHRAUBE M 14-45 VZ		45	12
SCHRAUBE M 14-50 VZ		50	12
SCHRAUBE M 14-55 VZ		55	12
SCHRAUBE M 14-60 VZ		60	12
SCHRAUBE M 14-65 VZ		65	12
SCHRAUBE M 14-70 VZ		70	12
SCHRAUBE M 14-75 VZ		75	12
SCHRAUBE M 14-80 VZ		80	12
SCHRAUBE M 16-50 VZ	M 16	50	14
SCHRAUBE M 16-55 VZ	M 16	55	14
SCHRAUBE M 16-60 VZ	M 16	60	14
SCHRAUBE M 16-70 VZ	M 16	70	14
SCHRAUBE M 16-80 VZ	M 16	80	14
SCHRAUBE M 16-90 VZ	M 16	90	14
SCHRAUBE M 16-100 VZ	M 16	100	14
SCHRAUBE M 20-60 VZ	M 20	60	17
SCHRAUBE M 20-65 VZ	M 20	65	17
SCHRAUBE M 20-70 VZ	M 20	70	17
SCHRAUBE M 20-90 VZ	M 20	90	17
SCHRAUBE M 20-100 VZ	M 20	100	17
SCHRAUBE M 20-110 VZ	M 20	110	17
SCHRAUBE M 20-120 VZ	M 20	120	17

AF = Width across flats

Product versions

SCHRAUBE M

Accessory for following products

FH (3000 PSI)	SAE flange half
FH (6000 PSI)	SAE flange half
VF (3000 PSI)	SAE full flange
VF (6000 PSI)	SAE full flange

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.