


# HK WW AL

Hand pump aluminium 700 bar

**HANSA FLEX**

## Properties

<b>Design</b>	internal pressure control valve
<b>Operating pressure</b>	max. 700 bar
<b>Connections</b>	3/8" Female NPT
<b>Material</b>	Aluminium housing
<b>Scope of supply</b>	Including manometer

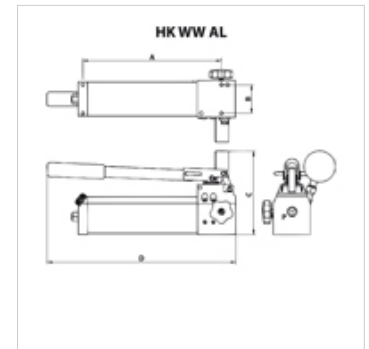

## Note

Attention: Please observe separate safety precautions for working with 700 bar equipment (see technical information)!

## Description

The use of 2-stage pumps is recommended for cylinders with large oil volumes.  
Hand lever can be used as carrying handle after locking.

## Item

Identification	useful oil volume (cc)	Levels	Volume level 1 max. (cc)	Volume level 2 max. (cc)	Pressure level 1 max. (bar)	Pressure level 2 max. (bar)	A (mm)	B (mm)	C (mm)	D (mm)	Weight (kg)
HK WW WH1	500,0	2	7,2	0,9	20	700	290	60	174	394	4,3
HK WW WH2	900,0	2	17,0	1,7	20	700	460	60	174	565	5,3

## Accessories

<b>NY 2100</b>	Thermoplastic extreme pressure hose
<b>GKS</b>	Rubber antikink protection
<b>PNY 2100 HN</b>	Swage nipple, AGN
<b>PHY 2100</b>	Swage ferrule, NY 2100
<b>SKL HN SP</b>	Screwed coupling, loose half
<b>SKL ZUBS SP</b>	Dust protection for SKL...SP
<b>SKF IN SP</b>	Screwed coupling fixed half
<b>SKF ZUBS SP</b>	Dust protection for SKF...SP