


# HK WW AL

Hand pump aluminium 700 bar

**HANSA FLEX**

## Properties

|                           |                                 |
|---------------------------|---------------------------------|
| <b>Design</b>             | internal pressure control valve |
| <b>Operating pressure</b> | max. 700 bar                    |
| <b>Connections</b>        | 3/8" Female NPT                 |
| <b>Material</b>           | Aluminium housing               |
| <b>Scope of supply</b>    | Including manometer             |

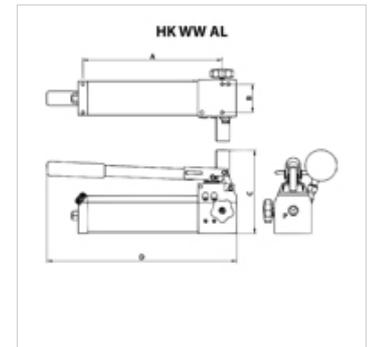

## Note

Attention: Please observe separate safety precautions for working with 700 bar equipment (see technical information)!

## Description

The use of 2-stage pumps is recommended for cylinders with large oil volumes.  
Hand lever can be used as carrying handle after locking.

## Item

| Identification | useful oil volume (cc) | Levels | Volume level 1 max. (cc) | Volume level 2 max. (cc) | Pressure level 1 max. (bar) | Pressure level 2 max. (bar) | A (mm) | B (mm) | C (mm) | D (mm) | Weight (kg) |
|----------------|------------------------|--------|--------------------------|--------------------------|-----------------------------|-----------------------------|--------|--------|--------|--------|-------------|
| HK WW WH1      | 500,0                  | 2      | 7,2                      | 0,9                      | 20                          | 700                         | 290    | 60     | 174    | 394    | 4,3         |
| HK WW WH2      | 900,0                  | 2      | 17,0                     | 1,7                      | 20                          | 700                         | 460    | 60     | 174    | 565    | 5,3         |

## Accessories

|                    |                                     |
|--------------------|-------------------------------------|
| <b>NY 2100</b>     | Thermoplastic extreme pressure hose |
| <b>GKS</b>         | Rubber antikink protection          |
| <b>PNY 2100 HN</b> | Swage nipple, AGN                   |
| <b>PHY 2100</b>    | Swage ferrule, NY 2100              |
| <b>SKL HN SP</b>   | Screwed coupling, loose half        |
| <b>SKL ZUBS SP</b> | Dust protection for SKL...SP        |
| <b>SKF IN SP</b>   | Screwed coupling fixed half         |
| <b>SKF ZUBS SP</b> | Dust protection for SKF...SP        |