

HK PA MC
Cable gland Ex protection

Properties

Design	Cable glands in accordance with ATEX, IECEx and EAC
Operating temperature	-60 °C to +100 °C
Material	Nickel-plated brass
Use	for use with non-armoured, plastic-insulated cables Ø 6.5 - 11.9 mm



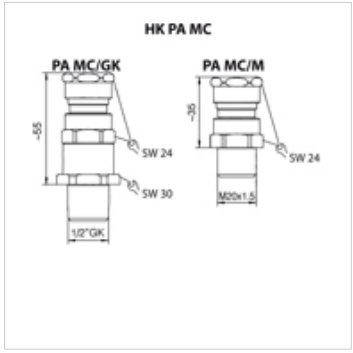

Item

Identification	Thread	Weight (kg)
HK PA MC GK	G 1/2”	0,3
HK PA MC M	M 20 x 1.5	0,3

Accessory for following products

HK DHA	Solenoid-operated directional control valve size 6, Ex-protected

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.