


# HK PA MC

Cable gland Ex protection

## Properties

|                              |   |
|------------------------------|---|
| <b>Design</b>                | Cable glands in accordance with ATEX, IECEx and EAC                 |
| <b>Operating temperature</b> | -60 °C to +100 °C   |
| <b>Material</b>              | Nickel-plated brass   |
| <b>Use</b>                   | for use with non-armoured, plastic-insulated cables Ø 6.5 - 11.9 mm |

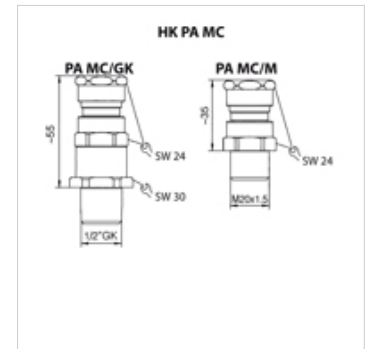

## Item

| Identification | Thread     | Weight (kg) |
|----------------|------------|-------------|
| HK PA MC GK    | G 1/2"     | 0,3         |
| HK PA MC M     | M 20 x 1.5 | 0,3         |

## Accessory for following products

|        |  |
|--------|--|
| HK DHA | Solenoid-operated directional control valve size 6, Ex-protected |
|--------|--|